
SCAME

■ EMPTY DISTRIBUTION ASSEMBLIES



■ REFERENCE STANDARDS

EN 60670-1

Boxes and enclosures for electrical accessories for household and similar fixed electrical installations. Part 1: general requirements.

QUALITY MARKS



VERSIONS






TECHNICAL CHARACTERISTICS

Protection degree:	IP41
Operating temperature according to the	
reference standard::	-15°C +35°C
Max. operating temperature	60°C
Glow Wire test:	650°C
Material:	Engineering plastic
IK degree at 20°C:	IK08
Total insulation :	Yes
Halogen free:	Yes
Colour:	Grey RAL 7035

■ BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline	Acids		Bases		Solvents				Mineral	UV
solution Con	ncentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol	oil	rays
	Limited lesistance	Resistant	Resistant	Resistant	Resistant	Not Resistant	Not Resistant	Limited Resistance	Limited Resistance	Resistant

DIMENSIONS

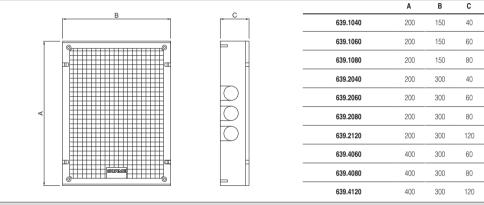

(Dimension in mm)

APPLICATION EXAMPLES

