




KRO 6-2/C

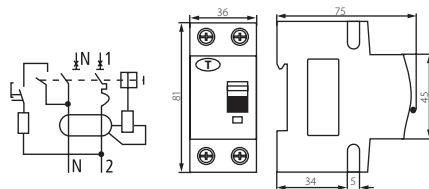

CHARAKTERISTIKA C					
	In	IΔN	NÁZOV	KÓD	BALENIE
TYP AC 	10A	30mA	KRO6-2/C10/30	23215	1/-/60
	16A	30mA	KRO6-2/C16/30	23217	1/-/60
TYP A 	10A	30mA	KRO6-2/C10/30-A	23216 "1"	1/-/60
	16A	30mA	KRO6-2/C16/30-A	23218	1/-/60

SK

Prúdový chránič s ističom: slúži k ochrane proti preťaženiu a skratu v elektrických inštaláciách a zariadeniach a ochrane proti úrazu el. prúdom

Zhoda snormou: EN / IEC 61009-1

Menovitá vypínacia schopnosť ističa: 6kA zhodne s EN / IEC60898-1

Menovitý reziduálny prúd IΔn: 30mA

Menovité spinacie napätie: 230V AC 50/60Hz

Pracovná teplota: -25°C to +40°C

Kapacita kapacita svoriek: lanko do 10mm², drôt do 16mm²

Krytie: IP20

„I“: produkty len na individuálnu objednávku

GB

The residual-current circuit breaker with overload protection: protection is used for protection of conductors against overloads and short-circuits in systems and equipment, as well as for anti-shock protection

Compliance with: EN / IEC 61009-1

Rated breaking capacity: 6kA in accordance with EN / IEC60898-1

Rated residual current IΔn: 30mA

Rated breaking voltage: 230V AC 50/60Hz

Operating temperature: -25°C to +40°C

Capacity of terminals: cord to 10mm², wire to 16mm²

Degree of protection: IP20

„I“: Product for individual orders