

Přisazené svítidlo LED s čidlem
Prisadené svietidlo LED s čidlom




LED SMD




VARSO LED-SE

microwave
MOTION
sensor


LED
technology




VARSO LED 18W...L



VARSO LED 24W...L

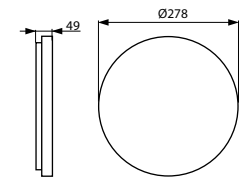

VARSO LED 18W...O

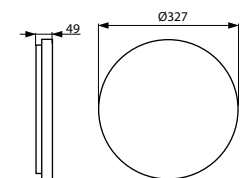

VARSO LED 24W...O



VARSO LED...L-SE




VARSO LED...O-SE



Kanlux



| Model | Code | Height [mm] | Width [mm] | Depth [mm] |
|-----------------------|-------|-------------|------------|------------|
| VARSO LED 18W-NW-L-SE | 26980 | 18 | 1700 | 4000 |
| VARSO LED 18W-NW-O-SE | 26981 | 18 | 1700 | 4000 |
| VARSO LED 18W-WW-O-SE | 26982 | 18 | 1620 | 3000 |
| VARSO LED 24W-NW-L-SE | 26983 | 24 | 2280 | 4000 |
| VARSO LED 24W-NW-O-SE | 26984 | 24 | 2280 | 4000 |

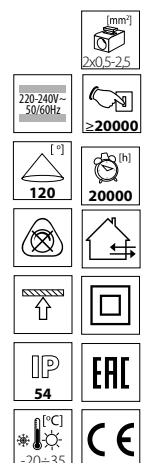

CZ

bilá
těleso svítidla: polykarbonát (PC) / difúzor: polykarbonát (PC)

Dosah čidla: max. 9m / Detekční úhel čidla: 360° / Nastavení doby svícení: 5s - 5min / Regulace intenzity okolního osvětlení: 2/10/50 lx/OFF

SK

biela
teleso svietidla: polykarbonát (PC) / difúzor: polykarbonát (PC)

Dosah snímača: max. 9m / Detekčný uhol snímača: 360° / Nastavenie doby svietenia: 5s - 5min / Regulácia intenzity okolitého osvetlenia: 2/10/50 lx / OFF